



TY-BE

SPD for Data Protection

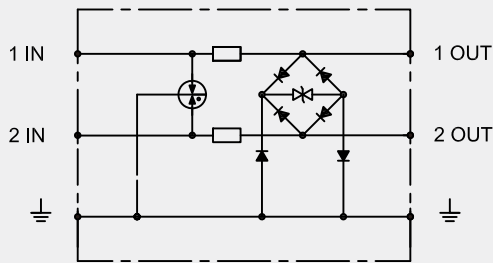

		TY-BE-6	TY-BE-24	TY-BE-48
Test standards		IEC 61643-21	IEC 61643-21	IEC 61643-21
Nominal voltage	Un	5V	24V	48V
Max. continuous operating voltage	Uc	6V	30V	70V
Nominal current	IL	500mA	500mA	500mA
C2 Nominal discharge current(8/20μs)	In	5kA	5kA	5kA
Voltage protection level[line-line]	Up	≤15V	≤60V	≤110V
Voltage protection level[line-PG]	Up	≤600V	≤600V	≤600V
Response time [line-line]	tA	≤1ns	≤1ns	≤1ns
Response time [line-PG]	tA	≤100ns	≤100ns	≤100ns
Operating temperature range	TU	-40℃...+80℃	-40℃...+80℃	-40℃...+80℃
Connection		Terminal Block	Terminal Block	Terminal Block
Bandwidth		10 Mbps	10 Mbps	10 Mbps
Insertion Loss		≤0.3dB	≤0.3dB	≤0.3dB
For mounting on		35mm Din rail	35mm Din rail	35mm Din rail
Enclosure material		Thermal plastic UL94-V0		
Degree of protection		IP20	IP20	IP20